



1. DIMENSIONAL OUTLINE

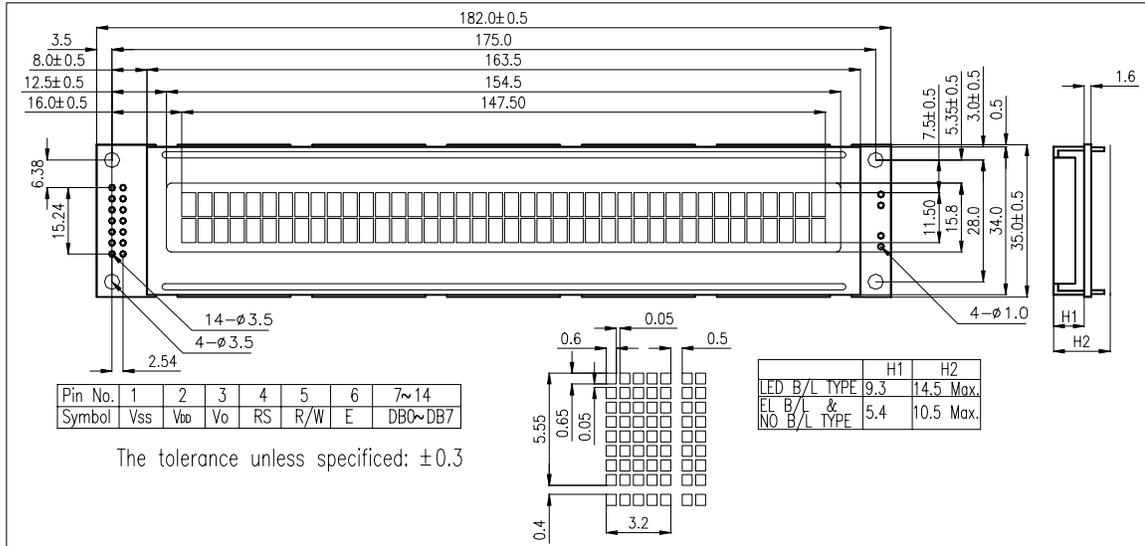

2. BLOCK DIAGRAM

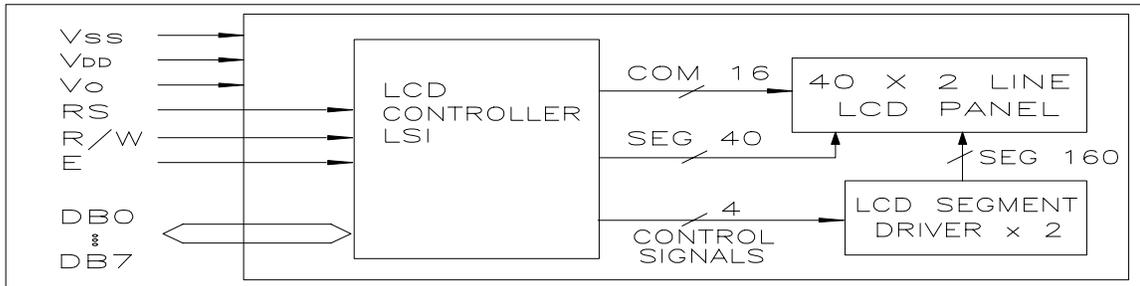

3. MECHANICAL SPECIFICATIONS

ITEM	SPECIFICATIONS	UNIT	REMARK
DIMENSIONAL OUTLINE	182.0 (W) × 35.0 (H) × 10.5/14.5Max. (T)	mm	*REFERENCE DIMENSIONAL OUTLINE
VIEWING AREA	154.5 (W) × 15.8 (H)		
CHARACTER PITCH	3.7 (W) × 5.95 (H)		
CHARACTER SIZE	3.2 (W) × 5.55 (H)		
NUMBER OF CHARACTERS	40 CHARACTERS × 2 LINES	-	
DOT PITCH	0.65 (W) × 0.70 (H)	mm	
DOT SIZE	0.60 (W) × 0.65 (H)	mm	

4. ELECTRICAL CHARACTERISTICS (T_a=25°C, V_{DD}=5.0V ± 0.25V)

ITEM	SYMBOL	CONDITION	MIN	TYPE	MAX.	UNIT
INPUT HIGH VOLTAGE	V _{IH}	-	2.2V	-	V _{DD}	V
INPUT LOW VOLTAGE	V _{IL}	-	-0.3	-	0.6	V
OUTPUT HIGH VOLTAGE	V _{OH}	-I _{OH} =0.1mA	2.4	-	-	V
OUTPUT LOW VOLTAGE	V _{OL}	I _{OL} =0.1mA	-	-	0.4	V
SUPPLY CURRENT	I _{DD}	V _{DD} =5.0V	-	3.0	5.0	mA
OPERATING VOLTAGE FOR LCD	V _{DD} -V _O	T _a =25°C	STN	-	5.0	V
		TN	-	4.5	-	V